




Cota A	
1	37MM

Technical drawing of a rectangular plate with the following dimensions and features:

- Overall width: 62
- Overall height: 85
- Inner width (between mounting holes): 49,5
- Inner height (between mounting holes): 60,45
- Mounting holes: Four hexagonal holes, one in each corner.
- Central hole: A large circular hole in the center.
- Small holes: Two small circular holes, one in the upper half and one in the lower half, centered horizontally.
- Dimensions for small holes: The distance between the centers of the two small holes is 19,85.
- Edge dimensions: The distance from the outer edge to the center of the mounting holes is 6,25 on all sides.

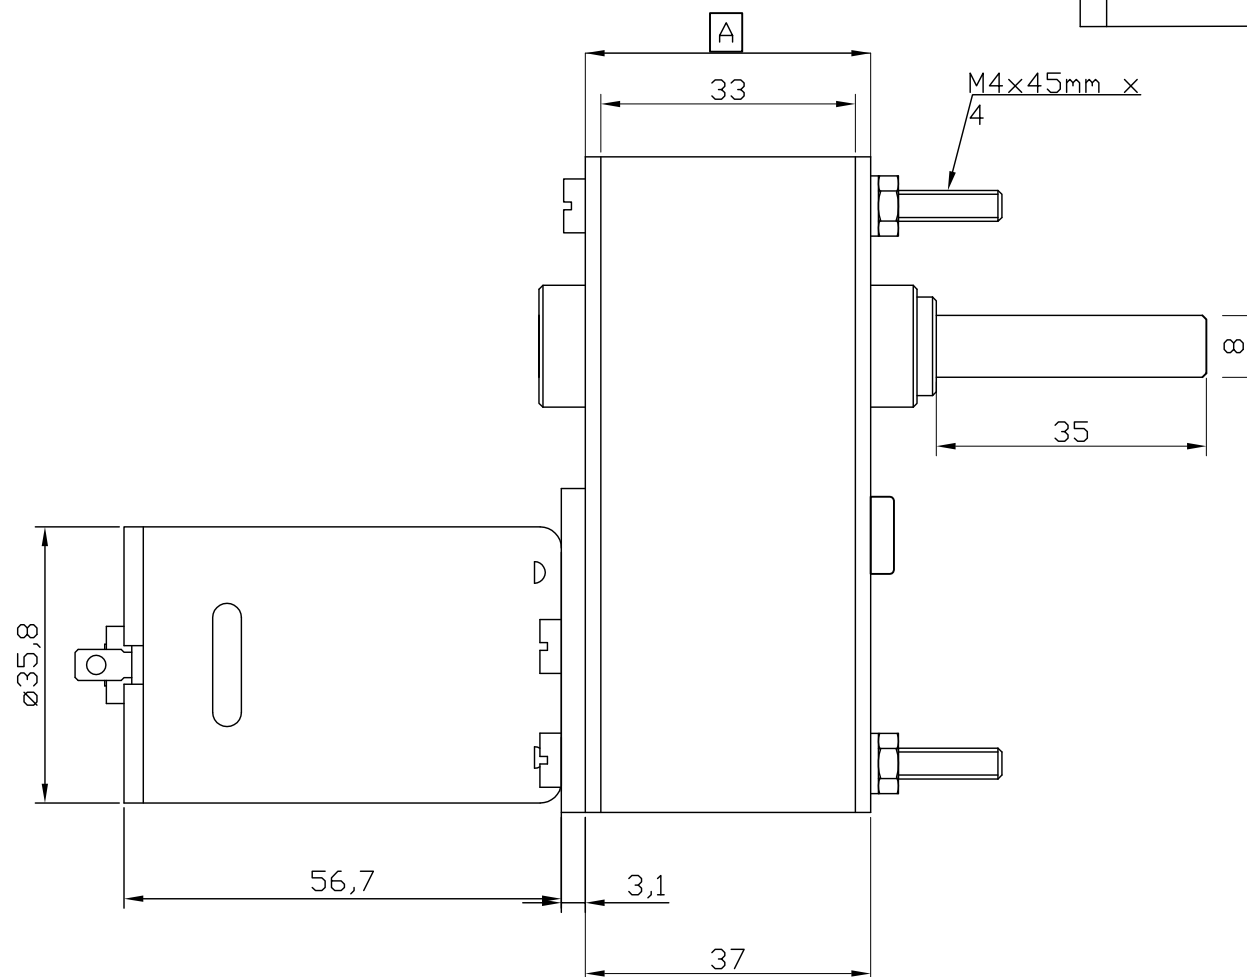

Motoredutor MGR8562-203 DC

Relações de Transmissão Redutor MGR8562 DC - Z53 - 12 VOLTS

MOTORES CORRENTE CONTÍNUA (CC)							
MODELO 203 - (CC)							
Redução	N.	6870 12 Vcc		9735 12 Vcc		13575 12 Vcc	
I = X:1	Pares	3700 rpm		7400 rpm		13600 rpm	
		Veloc.	Torque	Veloc.	Torque	Veloc.	Torque
		RPM	Kgf.cm	RPM	Kgf.cm	RPM	Kgf.cm
16,036	2	230,7	1,4	461,5	2,7	848,1	3,7
16,863	2	219,4	1,5	438,8	2,9	806,5	3,9
53,401	3	69,3	4,8	138,6	9,1	254,7	12,4
68,752	3	53,8	6,2	107,6	11,7	197,8	15,9
217,713	4	17,0	19,7	34,0	37,0	62,5	50,4
280,296	4	13,2	25,3	26,4	47,6	48,5	64,9
887,606	5	4,2		8,3		15,3	
1142,75	5	3,2	EX	6,5	EX	11,9	EX

Obs. As velocidades podem ser influenciadas pela carga aplicada em -20%

Ex: Excede o máximo de torque permitido 70kgf.cm

Motoredutor MGR8562-203 DC

Relações de Transmissão Redutor MGR8562 DC - Z53 - 24 VOLTS

MOTORES DE CORRENTE CONTINUA 24 VOLTS - MODELOS 203 E 204															
Redução	N.	37200 24 VDC		42600 24VDC		48540 24 VDC		54450 24 VDC		54315 24 VDC		8010 24 VDC		204 24 VDC	
I = X:1	Pares	1600 rpm		3100 rpm		3600 rpm		4400 rpm		6600 rpm		9800 rpm		4100 rpm	
		Veloc.	Torque	Veloc.	Torque	Veloc.	Torque	Veloc.	Torque	Veloc.	Torque	Veloc.	Torque	Veloc.	Torque
		RPM	Kgf.cm	RPM	Kgf.cm	RPM	Kgf.cm	RPM	Kgf.cm	RPM	Kgf.cm	RPM	Kgf.cm	RPM	Kgf.cm
16,036	2	99,8	1,0	193,3	2,0	224,5	1,5	274,4	2,7	411,6	2,2	611,1	3,3	255,7	5,7
16,863	2	94,9	1,1	183,8	2,1	213,5	1,6	260,9	2,8	391,4	2,3	581,2	3,5	243,1	5,9
53,401	3	30,0	3,4	58,1	6,6	67,4	5,0	82,4	9,0	123,6	7,3	183,5	11,1	76,8	18,8
68,752	3	23,3	4,4	45,1	8,5	52,4	6,5	64,0	11,5	96,0	9,4	142,5	14,3	59,6	24,2
217,713	4	7,3	13,9	14,2	26,9	16,5	20,6	20,2	36,5	30,3	29,7	45,0	45,3	18,8	76,7
280,296	4	5,7	17,9	11,1	34,6	12,8	26,5	15,7	47,1	23,5	38,3	35,0	58,3	14,6	
887,606	5	1,8	56,6	3,5		4,1		5,0		7,4		11,0		4,6	
1142,75	5	1,4	72,9	2,7	EX	3,2	EX	3,9	EX	5,8	EX	8,6	EX	3,6	EX

Obs. As velocidades podem ser influenciadas pela carga aplicada em -20%

Ex: Excede o máximo de torque permitido 70kgf.cm